
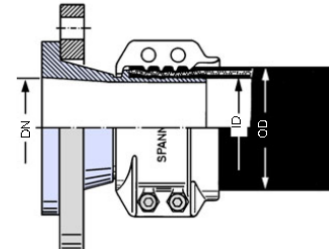
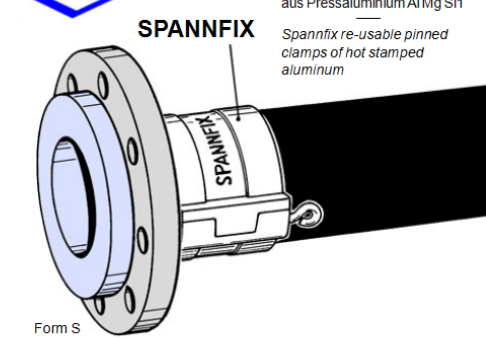

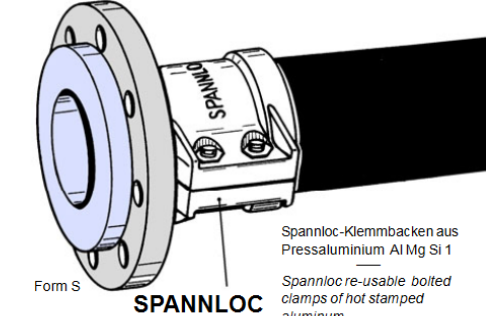
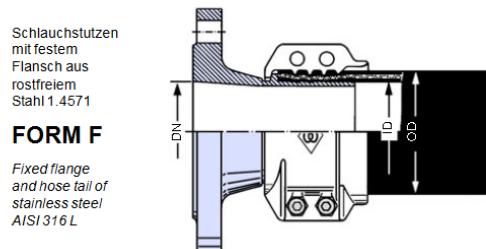


## Flansch-Schalenarmatur Edelstahl Typ FFC/SFC – SC/SX-Einbindung

GE- WICHT Weight Approx. ≈ kg	SCHLAUCH- GRÖSSE Hose Size		FLANSCH NENNWEITE Flange Diam. Nominal mm/in.	FLANSCHNORM NENNDRUCK Flange Standard Pressure Nominal 1)	FLANSCH FORM Flange Style Form	BESTELL- NUMMER Part Number Type	
	ID mm	OD mm					
1,3	19 (3/4")	30 - 33	DN 20	DIN PN 40 (PN 10, 16, 25, 40)	S	SFC 19.40 SS	Schlauchflansche nach DIN EN 1092-1 für Lösungsmittel, Säuren, Laugen und Chemikalien gemäß Beständigkeitsübersicht Seite 250. Nicht geeignet für Salzsäure in allen Konzentrationen. Für Saug- und Druckbeanspruchung bis 16 bar Betriebsdruck  Flanged hose fittings acc. to EN 1092-1 for chemicals, solvents, acids and alkalis - see resistance chart page 250. Not suitable for hydrochloric acid in any concentration. For suction and pressure service up to 16 bar working pressure.
1,2					F	FFC 19.40 SS	
1,0			3/4"	ASA 150	S	SFC 19.150 SS	
1,2					F	FFC 19.150 SS	
1,7	25 (1")	36 - 39	DN 25	DIN PN 40 (PN 10, 16, 25, 40)	S	SFC 25.40 SS	
1,5					F	FFC 25.40 SS	
1,3			1"	ASA 150	S	SFC 25.150 SS	
1,7					F	FFC 25.150 SS	
2,4	32 (1 1/4")	43 - 46	DN 32	DIN PN 40 (PN 10, 16, 25, 40)	S	SFC 32.40 SS	
2,1					F	FFC 32.40 SS	
1,7			1 1/4"	ASA 150	S	SFC 32.150 SS	
1,8					F	FFC 32.150 SS	
2,8	38 (1 1/2")	50 - 53	DN 40	DIN PN 40 (PN 10, 16, 25, 40)	S	SFC 38.40 SS	
2,3					F	FFC 38.40 SS	
2,1			1 1/2"	ASA 150	S	SFC 38.150 SS	
2,2					F	FFC 38.150 SS	
3,6	50 (2")	63 - 67	DN 50	DIN PN 16 (PN 10, 16)	S	SFC 50.16 SS	
3,2					F	FFC 50.16 SS	
3,3			2"	ASA 150	S	SFC 50.150 SS	
3,4					F	FFC 50.150 SS	
4,4	63 (2 1/2")	78 - 82	DN 65	DIN PN 16 (PN 10, 16)	S	SFC 63.16 SS	
3,9					F	FFC 63.16 SS	
4,7			2 1/2"	ASA 150	S	SFC 63.150 SS	
4,5					F	FFC 63.150 SS	
5,8	75 (3")	89 - 94	DN 80	DIN PN 16 (PN 10, 16)	S	SFC 75.16 SS	
4,9					F	FFC 75.16 SS	
5,7			3"	ASA 150	S	SFC 75.150 SS	
5,7					F	FFC 75.150 SS	
7,9	100 (4")	114 - 119	DN 100	DIN PN 16 (PN 10, 16)	S	SFC 100.16 SS	
7,2					F	FFC 100.16 SS	
9,2			4"	ASA 150	S	SFC 100.150 SS	
9,4					F	FFC 100.150 SS	
16,6	150 (6")	167 - 173	DN 150	DIN PN 16 (PN 10, 16)	S	SFC 150.16 SS	
16,0					F	FFC 150.16 SS	
17,8			6"	ASA 150	S	SFC 150.150 SS	
19,2					F	FFC 150.150 SS	
2,0	25	36 - 38	DN 25	DIN PN 40 (PN 10, 16, 25, 40)	S	SFX 25.40 SS	 <p><b>FORM S</b> Swiveling flange of steel Zn Cr 2) Hose tail of stainless steel AISI 316 L (316 Ti)</p>
1,8					F	FFX 25.40 SS	
2,7	32	43 - 45	DN 32	DIN PN 40 (PN 10, 16, 25, 40)	S	SFX 32.40 SS	
2,4					F	FFX 32.40 SS	
2,8	38	50 - 52	DN 40	DIN PN 40 (PN 10, 16, 25, 40)	S	SFX 38.40 SS	
2,4					F	FFX 38.40 SS	
3,5	50	63 - 67	DN 50	DIN PN 16 (PN 10, 16)	S	SFX 50.16 SS	
3,2					F	FFX 50.16 SS	
4,4	63	78 - 81	DN 65	DIN PN 16 (PN 10, 16)	S	SFX 63.16 SS	
3,9					F	FFX 63.16 SS	
5,5	75	89 - 92	DN 80	DIN PN 16 (PN 10, 16)	S	SFX 75.16 SS	
4,7					F	FFX 75.16 SS	
7,2	100	115 - 118	DN 100	DIN PN 16 (PN 10, 16)	S	SFX 100.16 SS	
6,7					F	SFX 100.16 SS	

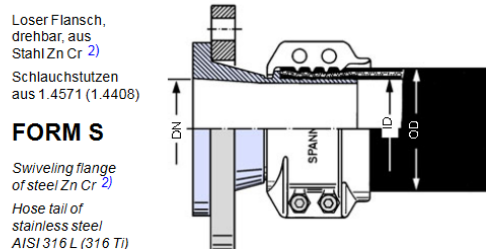

1) Flanschmaße siehe Seite 278 · Flange measurements see page 278