

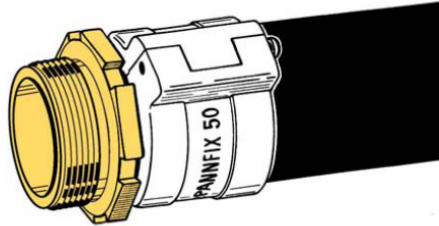
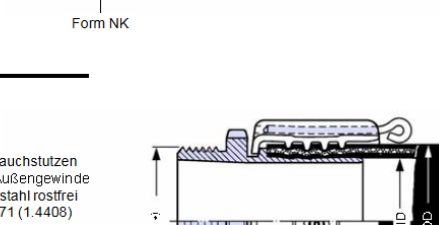

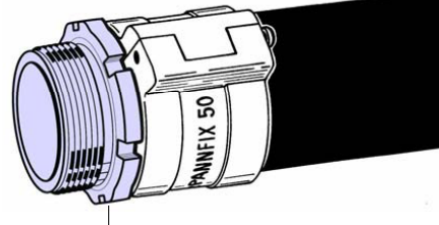


Schalenarmatur Typ VS, SX-Einbindung

GE- WICHT <i>Weight</i> <i>Approx.</i>	BUND FORM <i>Nut</i> <i>Style</i>	SCHLAUCH GRÖSSE <i>Hose</i> <i>Size</i>			GEWINDE ART + GRÖSSE <i>Thread</i> <i>Type + Size</i>	BESTELL- NUMMER <i>Part</i> <i>Number</i>				
		ID mm	ID in.	OD mm				G ^{*)}	Type	
0,3	K	25	1"	36 - 38	R 1" (BSP)	VX 25 - 1"	Vaterteil-Schlauchverschraubungen mit wiederverwendbarem SPANNFIX - Sicherheitsinband aus gepresstem Aluminium. Arretierstifte und Scharnierstifte aus nichtrostendem Stahl. Nenndruck bis 25 bar. - Chemische Beständigkeit siehe Seite 250.			
0,3	K				1" NPT (API)	VX 25 - 1" NPT				
0,3	K				R 1 1/4" (BSP)	VX 25 - 1 1/4"				
0,3	K	32	1 1/4"	43 - 45	R 1 1/4" (BSP)	VX 32 - 1 1/4"	<i>Male hose couplings with re-usable Spannfix pinned safety clamps of hot stamped aluminium. Pins of stainless steel. - Working pressure up to 25 bar. - Chemical resistance chart see page 250.</i>			
0,4	K				1 1/4" NPT (API)	VX 32 - 1 1/4" NPT				
0,4	K				R 1 1/2" (BSP)	VX 32 - 1 1/2"				
0,7	NK				R 2" (BSP)	VX 32 - 2"				
0,5	NK	38	1 1/2"	50 - 52	R 1 1/2" (BSP)	VX 38 - 1 1/2"	Schlauchstutzen mit Außengewinde aus Pressmessing <i>Hose tail with male thread of hot stamped brass</i>			
0,5	K				1 1/2" NPT (API)	VX 38 - 1 1/2" NPT				
0,6	NK				R 2" (BSP)	VX 38 - 2"				
0,6	K	40	-	53 - 56	R 2" (BSP)	VX 40 - 2"				
0,7	NK				R 2" (BSP)	VX 50 - 2"				
0,7	NK				50	2"		63 - 67	2" NPT (API)	VX 50 - 2" NPT
0,8	NK				R 2 1/2" (BSP)	VX 50 - 2 1/2"				
1,2	NK	63	2 1/2"	78 - 81	R 2 1/2" (BSP)	VX 63 - 2 1/2"				
1,3	NK				2 1/2" NPT (API)	VX 63 - 2 1/2" NPT				
1,3	NK				R 3" (API)	VX 63 - 3"				
1,2	NK	65	2 1/2"	78 - 81	R 2 1/2" (BSP)	(VX 65 - 2 1/2")				
1,3	NK				R 3" (BSP)	(VX 65 - 3")				
1,3	NK	75	3"	89 - 92	R 2 1/2" (BSP)	(VX 75 - 2 1/2")	Form NK			
1,3	NK				R 3" (BSP)	VX 75 - 3"				
1,6	NK				3" NPT (API)	VX 75 - 3" NPT				
2,7	NK	100	4"	115 - 118	R 4" (BSP)	VX 100 - 4"				
2,8	NK				4" NPT (API)	VX 100 - 4" NPT				
0,3	K	25	1"	36 - 38	R 1" (BSP)	VX 25 - 1" SS	Schlauchstutzen mit Außengewinde Edelstahl rostfrei 1.4571 (1.4408) <i>Hose tail with male thread of stainless steel 1.4571 (1.4408)</i>			
0,3	K				1" NPT (API)	VX 25 - 1" NPT SS				
0,4	K				R 1 1/4" (BSP)	VX 25 - 1 1/4" SS				
0,4	K	32	1 1/4"	43 - 45	R 1 1/4" (BSP)	VX 32 - 1 1/4" SS				
0,4	K				1 1/4" NPT (API)	VX 32 - 1 1/4" NPT SS				
0,4	K	38	1 1/2"	50 - 52	R 1 1/2" (BSP)	VX 38 - 1 1/2" SS	Form N			
0,5	K				1 1/2" NPT (API)	VX 38 - 1 1/2" NPT SS				
0,5	NK				R 2" (BSP)	VX 38 - 2" SS				
0,5	NK	50	2"	63 - 67	R 2" (BSP)	VX 50 - 2" SS				
0,6	N				2" NPT (API)	VX 50 - 2" NPT SS				
0,8	N	63	2 1/2"	78 - 81	R 2 1/2" (BSP)	VX 50 - 2 1/2" SS	DELSTAHL Rostfrei			
1,2	N				2 1/2" NPT (API)	VX 63 - 2 1/2" NPT SS				
1,3	N				R 3" (BSP)	VX 63 - 3" SS				
1,0	NK	75	3"	89 - 92	R 3" (BSP)	VX 75 - 3" SS	Form NK			
1,1	N				3" NPT (API)	VX 75 - 3" NPT SS				
2,5	NK	100	4"	115 - 118	R 4" (BSP)	VX 100 - 4" SS	*) Gewindemaße siehe Seite 236 • Thread measurements see page 236			
2,6	N				4" NPT (API)	VX 100 - 4" NPT SS				